

EURON POWER ONLINE UNIT PLUS (POU+)

ONLINE UPS (HV:6-20KVA)


1:1 Phase

Features


- Wide Input Voltage
- Cold Start
- Advanced Battery Management
- Automatic Battery Charging on/off mode
- Lightning and Surge protection
- Automatic Fan speed adjustment
- Complete protection function
- Network/fax/modem surge protection
- LCD/LED display option
- EMI/RFI noise filter
- Smart Rs232 port with monitoring
- Software
- PFC Technology
- Parallel Function




Rear View

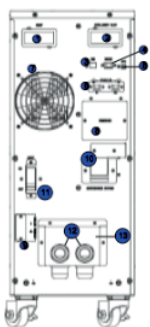

6KVA

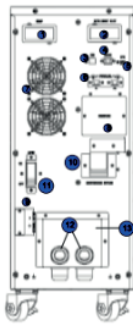

10KVA

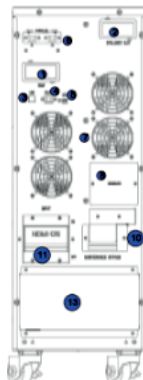

15KVA/20KVA

- 1 SNMP card slot
- 2 Dry contactor slot
- 3 USB port
- 4 RS 232
- 5 EPO

- 6 Parallel ports
- 7 Fans
- 8 Reserved customer function
- 9 Extra Battery connector
- 10 Internal maintenance bypass

- 11 Input breaker
- 12 Cable entry protector
- 13 Terminal cover

Technical Specification

Model (HV)	POU+6KVA	POU+10KVA	POU+15KVA	POU+20KVA
Capacity KVA/W	6KVA	10KVA	15KVA	20KVA
Input				
Acceptable Input Voltage	50%-125%(220/230/240VAC)			
Phase	Single Phase in, Single Phase Out			
Input Power Factor	1			
Input Frequency Range	40Hz-70Hz			
Frequency Adaptable	Settable			
Output				
Output PF	1			
Normal Output Voltage	220/230/240VAC			
Voltage Regulation	-,+1%			
THDu	<1% THD,linear load: <5%THD,no-linear load			
System				
Battery Number	12V*7aH*16Pcs			
Battery Voltage	192VDC			
Efficiency	94%(Line mode), 99%(Echo mode), 32%(Battery mode) 110%: Tranfer to bypass after 10 minutes			
Overload Capabilities (Inverter Mode)	130%: Tranfer to bypass after 1 minute 150%: Tranfer to bypass after 1 minute 110%: Shutdown after 10s			
Overload Capabilities (Battery Mode)	125%: Shutdown after 10s >125%: Shutdown after 1s			
Crest Ratio	3:1			
Display	LED+LCD			
Communication Interface	RS232,SNMP/Dry Contact/USB/Parallel Kits(Optional)			
W*D*H(mm)	250*526*645	250*526*705		250*526*648
Net Weight(kg)	58	64.5		80